




Comfort-Lok

Durable, modular matting

- Ideal anti-fatigue matting for greasy or oily areas.
- Hardwearing natural SBR rubber and nitrile.
- Suitable for high temperature environments.
- Comfortable standing surface for operatives.
- Diamond patterned surface provides underfoot grip.
- Conforms to Slip Resistance Test EN 13552 Category R9.
- Interlocking modules or single mat (edged all round).

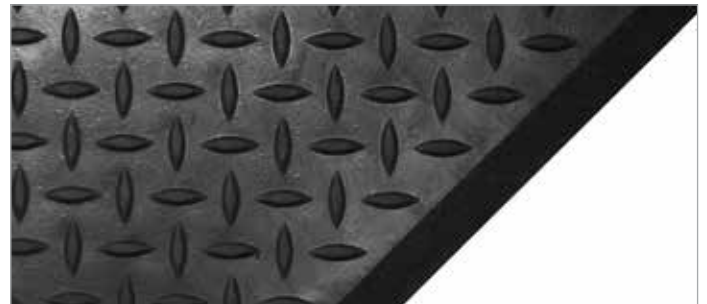

Technical Specification

Material:	Natural rubber/25% nitrile blend
Surface Finish:	Diamond Plate
Product Height:	12.5mm
Operating Temperature:	-30°C to +50°C
Resistant to Chemicals:	Natural rubber/nitrile blend offers an increased resistance to mineral oils and aggressive machine coolants
Environmental Resistance:	Water and Acid not fuels and degreasing oils
Typical Applications:	All industrial environments
Installation Method:	Loose lay
Cleaning Method:	Pressure hose
Product Performance:	Conforms to Slip Resistance Test EN 13552 Category R9
Country of Origin:	Sri Lanka

Sizes	Part Code	Weight
0.7m x 0.8m (edged all round)	CL010004	4.10 kg
0.7m x 0.8m (interlocking middle piece)	CL010002	4.10 kg
0.7m x 0.8m (interlocking end piece)	CL010001	4.10 kg