



Free-standing luminaire LAVIGO

DPS 14000/840/R/G2

121771000-00807385

Waldmann **W**


ENGINEERS OF LIGHT

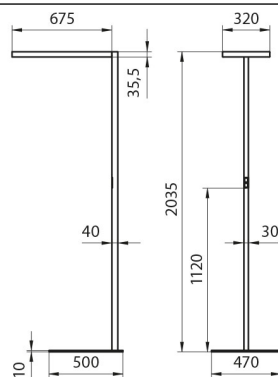

CEE 7/VII

D53 | 12.5% | 87.5% Φ : 14050 lm

UGR 4H 8H: <10 / <10



light source
work equipment
connected load
power consumption
power factor
luminous flux
luminous efficiency
light type/-color
colour temperatur
color rendering index
light distribution
direct ratio
chromaticity tolerance LED
glare control
luminance (L65)
unified glare rating (4H 8H)
system of protection
class of protection
technology
operation
housing
cover
arm
luminaire base
weight (net)
mains lead
fastening
decorative contrast side parts
life expectancy LED
special features

LED
electronic ballast
220 - 240 V; Wechselstrom (AC); 50 Hz; 60 Hz
ca. 93 W
env. 0,943
approx. 14.050 lm
approx. 151 lm/W
cold white
approx. 4.000 K
CRI > 80
direct/indirect
approx. 12 %
< 3 SDCM
conical prismatic screen
<= 3000 cd/m²
<= 10
IP 20
I
presence and daylight sensor control (PIR); DALI
multi-function switch
steel/plastic; painted; black
Acrylic (PMMA); satine
steel tube; painted; tubular section upright; black
C-form flat
ca. 19,7 kg
ca. 3 m; mains plug; CEE 7/VII
floor standing base
black
L80B50 60.000h
integrated light and presence sensor PIR;
separated, direct and indirect light individually
adjustable; retrofittable with TALK module; Flicker-
free; Cradle to Cradle Certified TM; Direct light
component with edge light and light-guide
technology for homogenous light exit; luminaire
head detachable